

D

C

B



A

D

C

B

A

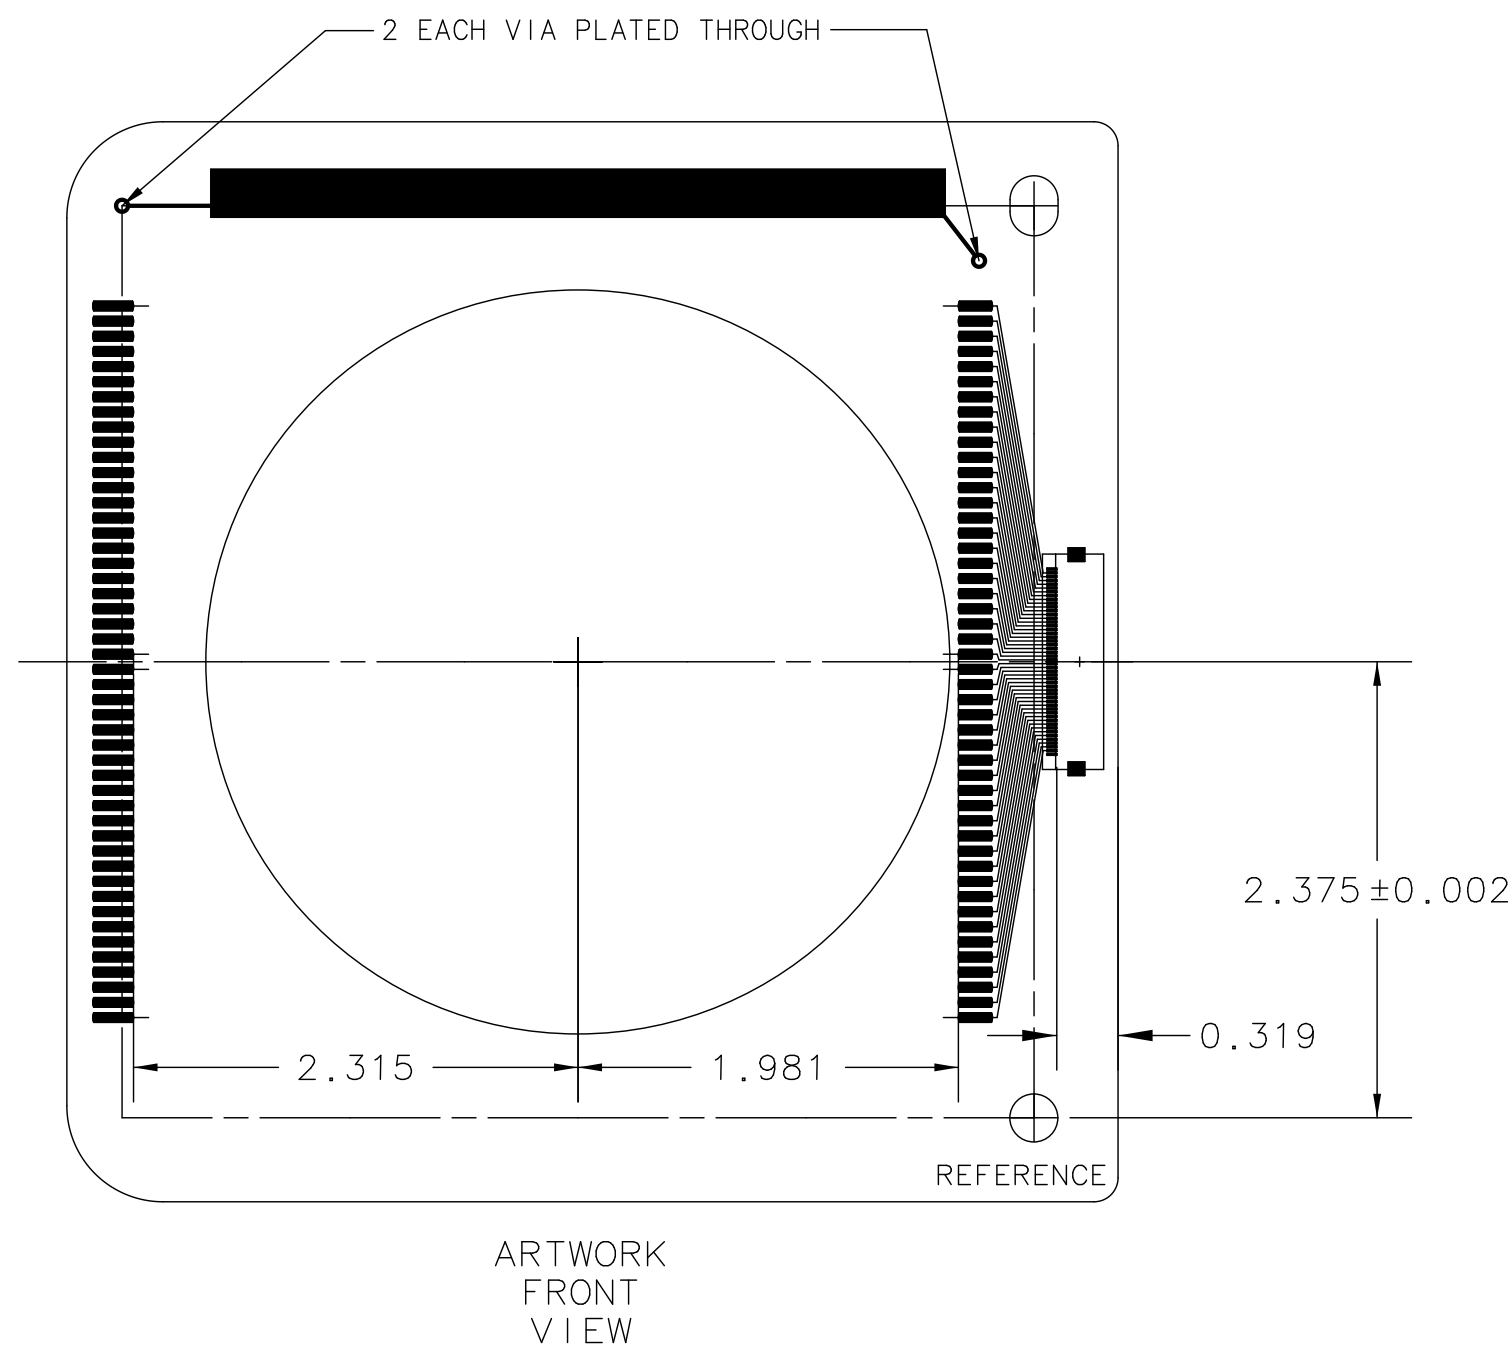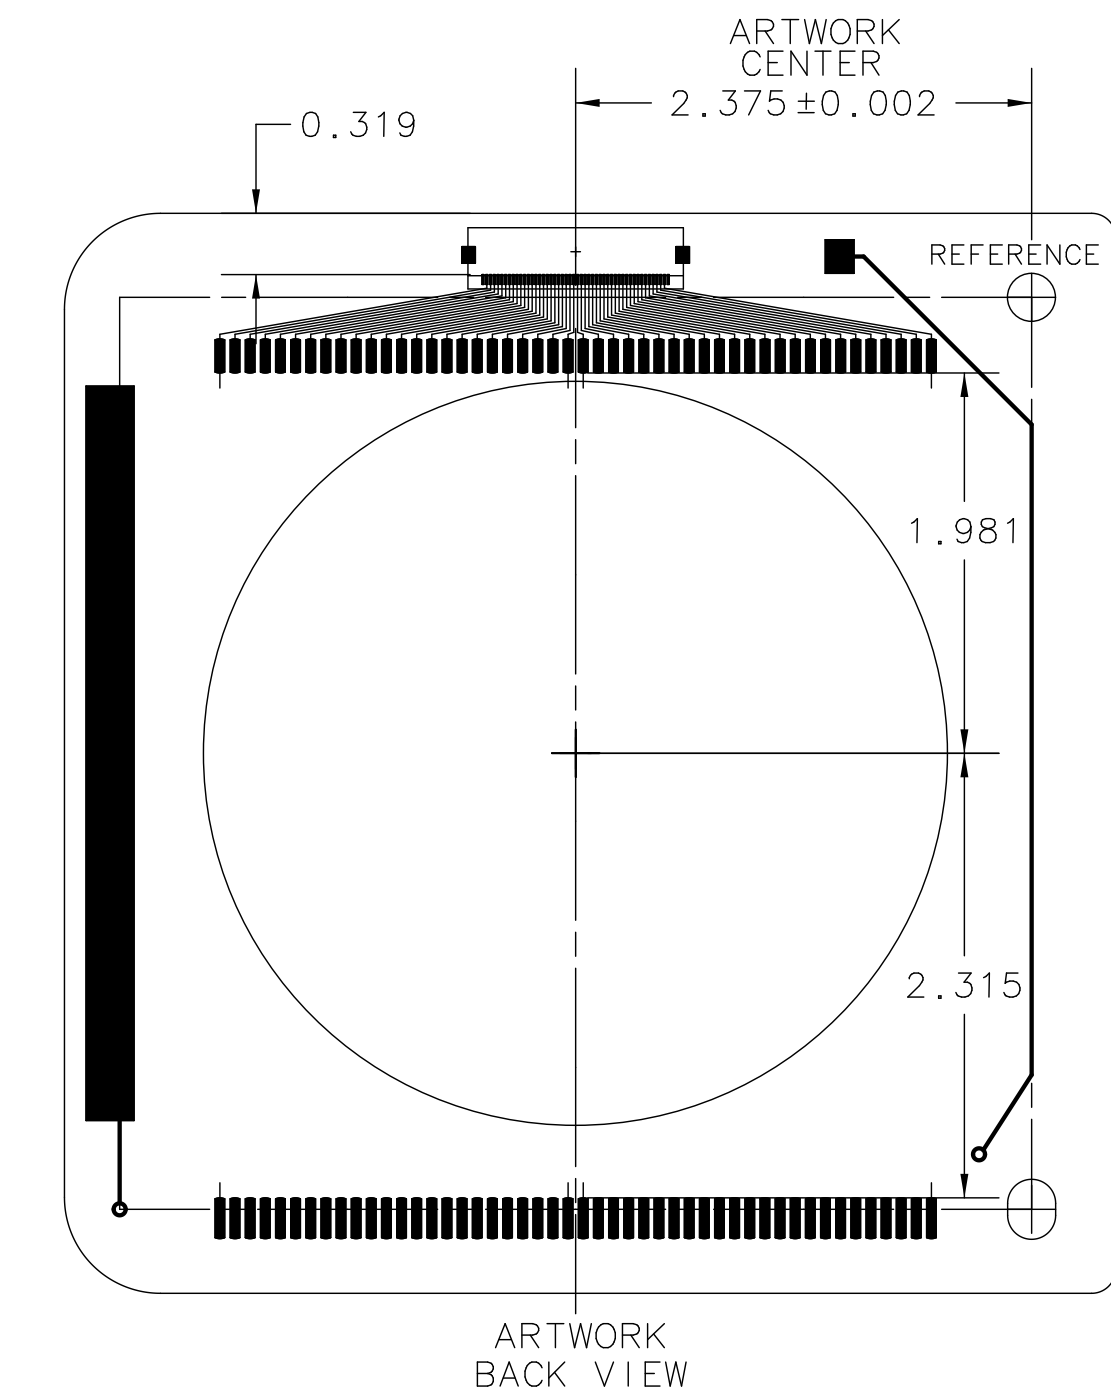


R0.500 2 EACH

Ø0.025  
2 EACH

NOTE:  
HOLE TOLERANCE TO BE ±.002  
CAMBER TO BE ±.003  
LENGTH/WIDTH TOLERANCE  
TO BE +.020/- .004

CENTER AND END WIRE ALIGNMENT MARKS  
PROJECTING FROM THE PADS SHOULD NOT BE  
REMOVED FROM THE FINAL ARTWORK SCREENS.

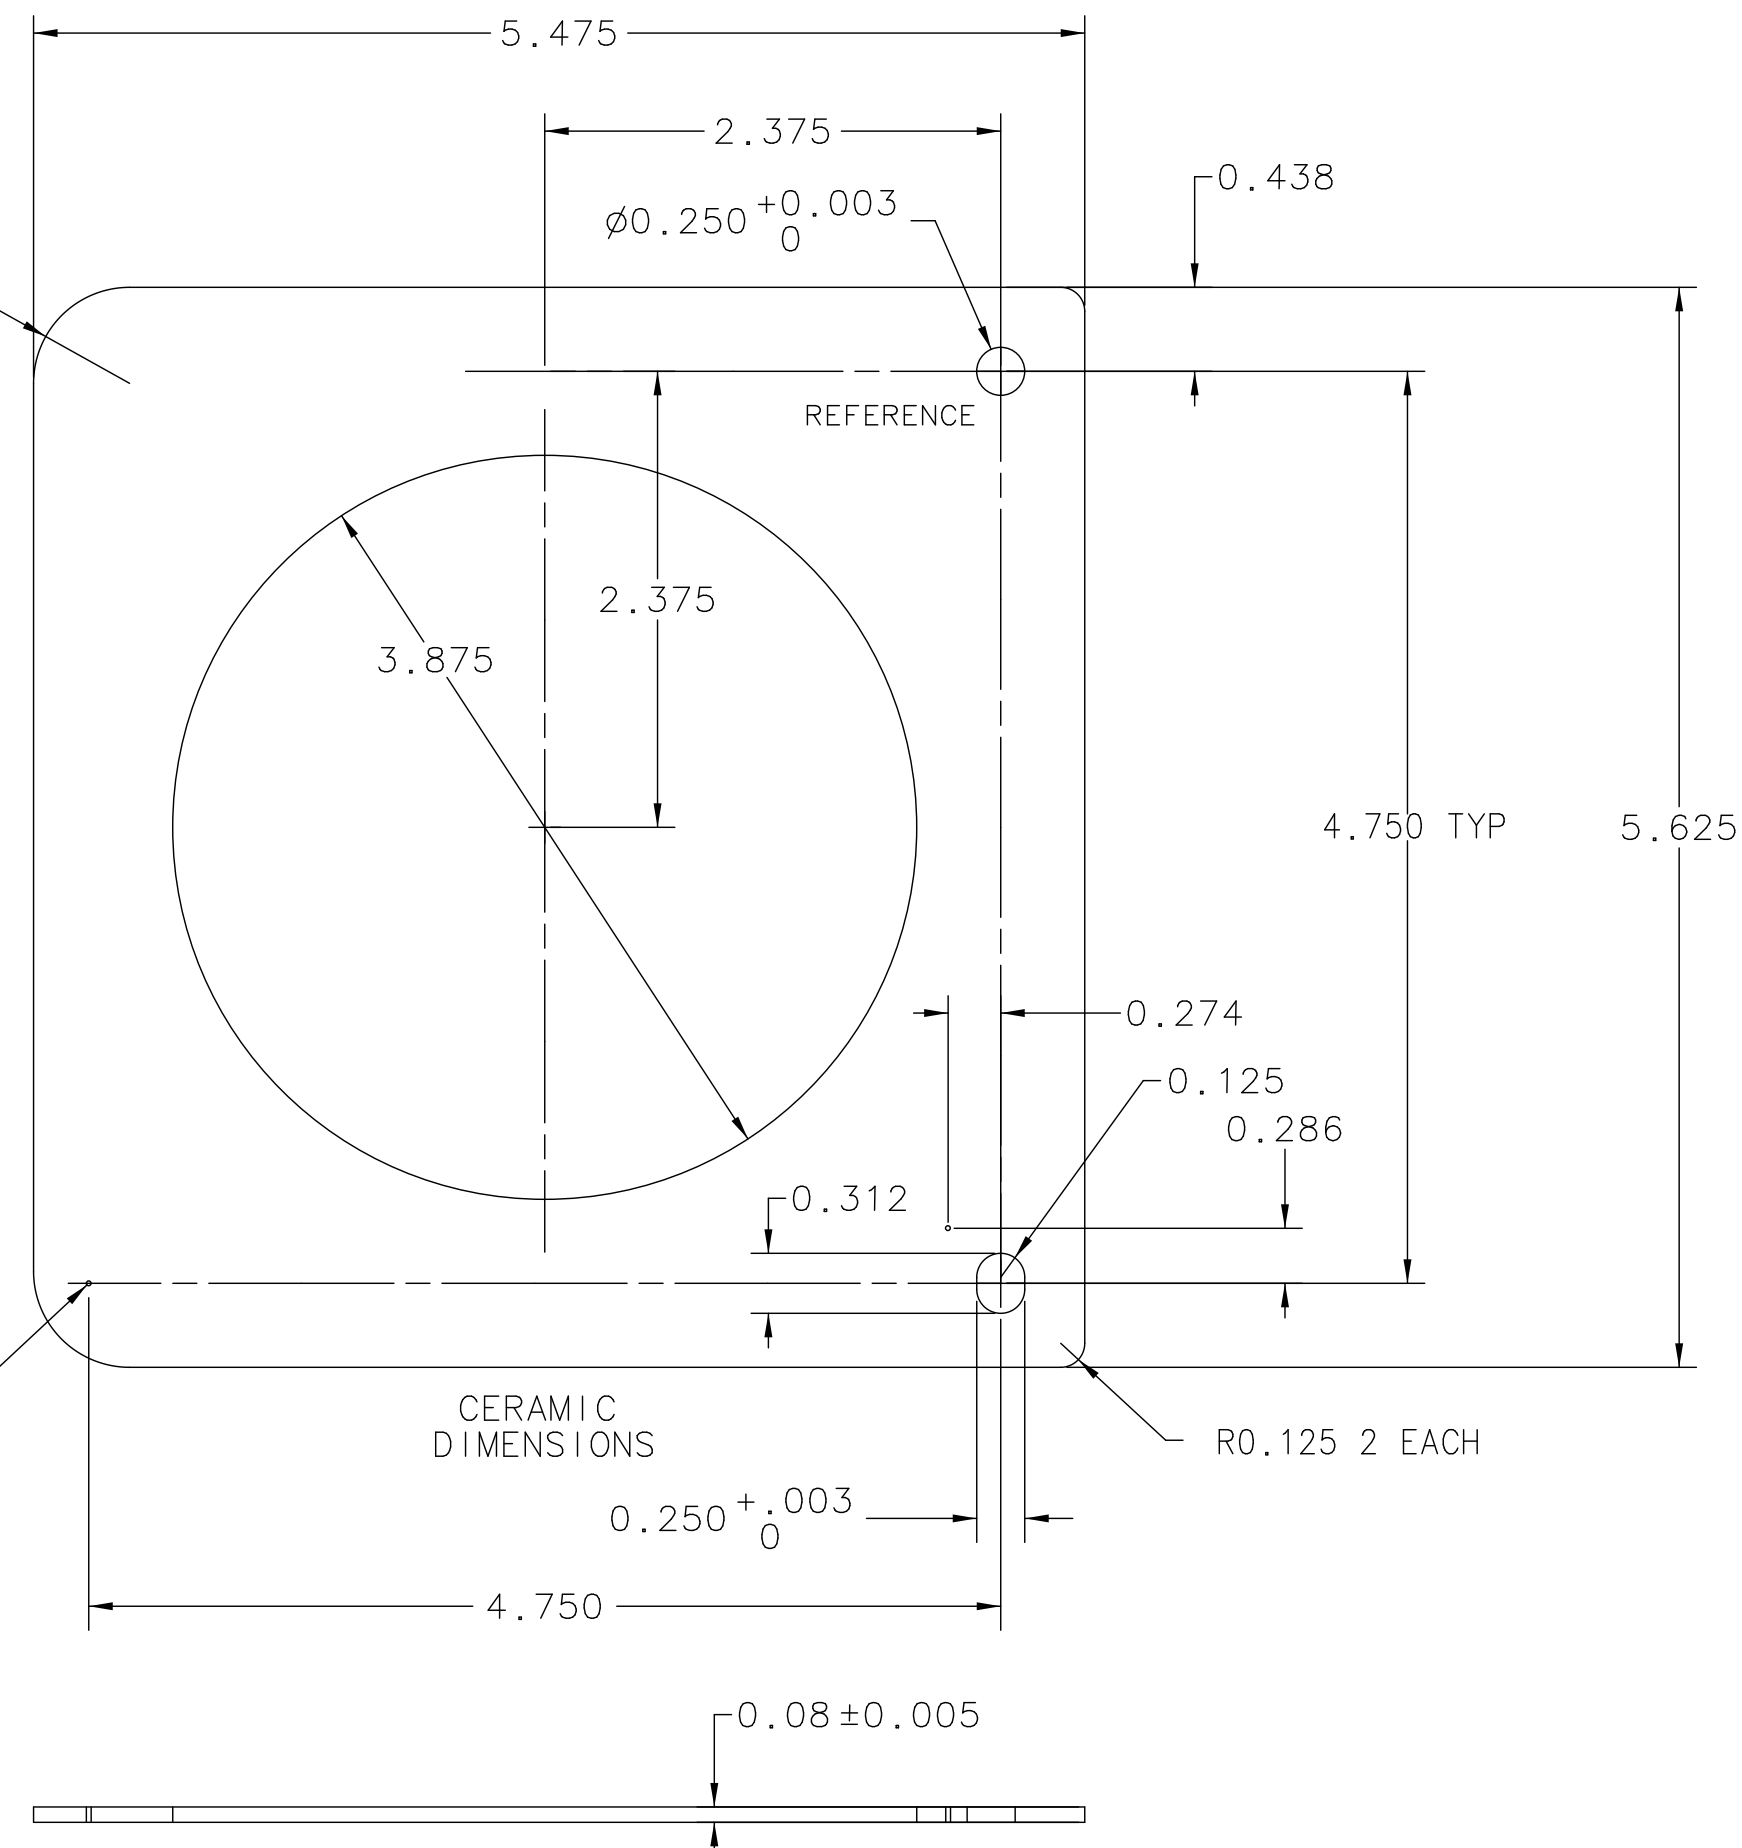

UNLESS OTHERWISE SPECIFIED			ORIGINATOR	D.SCHOO	18-MAY-2004
±	±	±	DRAWN	J.MICHALIC	15-FEB-2008
1. BREAK ALL SHARP EDGES MAX.			CHECKED	L.PURCELL-TAYLOR	10-AUG-2008
2. DO NOT SCALE DRAWING.			APPROVED	L.PURCELL-TAYLOR	10-AUG-2008
3. DIMENSIONS BASED UPON			USED ON		
4. MAX. ALL MACH. SURFACES			9508.000-ME-374488		
5. DRAWING UNITS:			MATERIAL		
			ALUMINA 96		



FERMI NATIONAL ACCELERATOR LABORATORY  
UNITED STATES DEPARTMENT OF ENERGY

MAIN INJECTOR  
MULTIWIRE DETECTOR  
DOUBLE SIDED 2MM CERAMIC FRAME

SCALE	DRAWING NUMBER	SHEET	REV
1:1	9508.000-MC-463183	1 OF 1	
CREATED WITH : Ideas12NXSeries		GROUP: ACCELERATOR MECH. SUPPT.	

NOTICE: IMAGE OBTAINED FROM FERMILAB WEB SITE  
This information is provided for REFERENCE use only.  
Not for MANUFACTURE, or DESIGN INFORMATION.  
All information contained in this document represents  
work sponsored by an agency of the U.S. Government.  
Neither the U.S. Government nor any agency thereof,  
nor Universities Research Association, Inc., nor any of  
their employees or officers, makes any warranty, express  
or implied, or assumes any legal liability or  
responsibility for the accuracy, completeness, or  
usefulness of any information, apparatus, product or  
process disclosed, or represents that its use would not  
infringe privately owned rights.